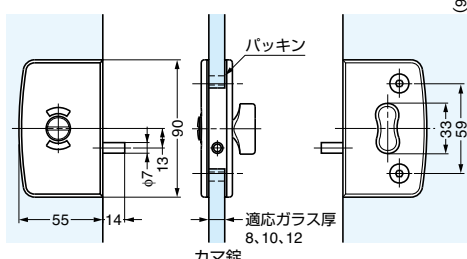


R
ガラス用金物

ガラスラッチ錠




L=R 取説 強化ガラス

[illegible]


Technical drawing of a rectangular plate. The main view shows a rectangle with a width of 20 and a height of 90. There are three holes: a central hole with a diameter of $\phi 11$ and two side holes with a diameter of $\phi 5$ and a depth of $\phi 9$. The distance from the top edge to the center of the top hole is 48. The distance from the center of the top hole to the center of the bottom hole is 74. A side view shows the plate has a thickness of 3.

ガラス厚	表示器側	サムターン側
8	t1×1枚	t2×2枚
10、12	t1×1枚	t2×1枚

L=R 取説 強化ガラス

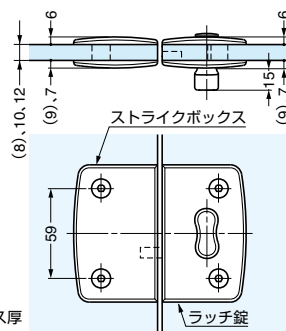

■取付加工図

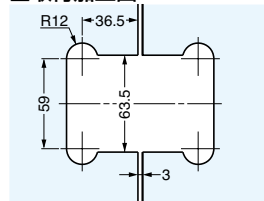

注文コード	品番	材料	仕上	適応ガラス厚	質量	1箱
140-017-889	CLS38-C	黄銅(真鍮)	クロムめっき	8, 10, 12	870g	1ヶ
140-017-890	CLS38-S	黄銅(真鍮)	サテン仕上	8, 10, 12	870g	1ヶ

SUGATSUNE

 このマークの製品はRoHS指令に対応しています。